

MAX-8

2019.6.1



MAX-8

Excellent Performances & Reliability

CPCD45T8/CPCD50T8-X

T8 Diesel Forklift 4.5/5.0t

EP EQUIPMENT CO.,LTD
www.ep-ep.com



CPCD45T8/CPCD50T8-X

T8 Diesel Forklift 4.5/5.0t

		EP			
		CPCD45T8	CPCD50T8-X	CPCD45T8	CPCD50T8-X
1 Manufacture					
2 Model					
3 Power type		Diesel			
4 Rated capacity		Kg	5000	4500	Diesel
5 Load center		mm	500	500	5000
6 Lift height		mm	3000	3000	500
7 Free lift height		mm	150	150	3000
8 Fork size		L×W×T	1070×150×55	1070×150×55	1070×150×55
9 Mast tilt range		F/R	6/10	6/10	6/10
10 Fork overhang(wheel center to fork face)		mm	565	565	565
11 Rear overhang		mm	540	540	565
12 Length to face of fork		mm	3070	3070	3095
13 Overall width		mm	1480	1480	1480
14 Mast lowered height		mm	2265	2265	2265
15 Mast extended height		mm	4250	4250	4250
16 Overhead guard height		mm	2250	2250	2250
17 Turning radius(outside)		mm	2830	2830	2830
18 Min.right angle stacking aisle wiath (Add load length and clearance)		mm	3595	3595	3595
19 Travel (No/Full load)		Km/h	22/20	22/20	22/20
20 Lifting (No/Full load)		mm/sec	480/430	480/450	480/430
22 Max.Drawbar Pull (Full load)		N	21000	21000	21000
23 Max.Gradeability (Full load)		%	20	20	20
24 Tyres		mm	300-15-14PR	300-15-14PR	300-15-14PR
25 Front		mm	700-12-12PR	700-12-12PR	700-12-12PR
26 Rear		mm	1180	1180	1180
27 Font		mm	1190	1190	1190
28 Rear		mm	2000	2000	2000
29 Wheelbase		mm	160/140	160/140	160/140
30 Mast		mm	195/180	195/180	195/180
31 Ground		mm	7050	7050	7050
32 Frame		kg	9805	9805	9805
33 Full load		mm	1465	1465	1465
34 Rear		mm	3046	3046	3046
35 Front		mm	3724	3724	3724
36 No load		V/AH	24/60	24/60	24/60
37 Rear		mm	24/60	24/60	24/60
38 Voltage/Capacity		Modal	S65	QSF2.8	4D35ZG31
39 Manufacture		MITSUBISHI	CUMMINS	XIN CHAI	XIN CHAI
40 Rated output/r.p.m		kw	52/2300	55/2200	60/2200
41 Rated torque/r.p.m		N.m	248/1700	300/1600	300/1600-1800
42 No.of cylinder		mm	6	4	4
43 Bore×Stroke		cc	94*120	94*100	98*115
44 Displacement		L	4996	2775	3460
45 Fuel tank capacity		L	90	90	90
46 Manufacture		Type	CHINA	Powershift	Powershift
47 Transmissions		Stage	2/1	2/1	2/1
48 Operating pressure		Mpa	17.5	17.5	17.5

1.Special lifting height available for further information please contact us. 2.Attachment available.


3.The specification in the table are for standard models only. For further information please contact us.



4.Specification are subject to change without notice.

Mast Option

4.5/5.0t T8 series mast: (pneumatic)

Type	Model	Max. fork height	Overall height				Free lift		Front Overhang	Tilt range		Capacity	
			Lowered	Extended		Without backrest	With backrest	FWD		BWD	Load capacity at 500 mm		
				Without backrest	With backrest						4.5t	5.0t	
													mm
Wide view mast	2W300	3000	2280	4175	3770	145	145	565	6	10	4500	5000	
	2W330	3300	2430	4475	4070	145	145	565	6	10	4500	5000	
	2W350	3500	2530	4675	4270	145	145	565	6	10	4500	5000	
	2W370	3700	2630	4875	4470	145	145	565	6	10	4350	4800	
	2W400	4000	2830	5175	4770	145	145	565	6	6	4250	4750	
	2W425	4250	2955	5425	5020	145	145	565	6	6	3800	4250	
wide view full 2-stage mast	2W450	4500	3080	5675	5270	145	145	565	6	6	3150	3500	
	2F271	2710	2250	3885	3480	1055	1355	565	6	10	4500	5000	
	2F300	3000	2395	4175	3770	1200	1500	565	6	10	4500	5000	
	2F330	3300	2545	4475	4070	1350	1650	565	6	10	4500	5000	
wide view full 3-stage mast	2F350	3500	2645	4675	4270	1450	1750	565	6	10	4500	5000	
	3F400	4000	2080	4780	5200	1230	900	578	6	6	4000	4500	
	3F435	4350	2195	5130	5550	1345	1015	578	6	6	3800	4250	
	3F450	4500	2245	5280	5700	1395	1065	578	6	6	3600	4000	
	3F470	4700	2310	5480	5900	1460	1130	578	6	6	3350	3750	
	3F500	5000	2460	5780	6200	1610	1280	578	6	6	3150	3500	
	3F550	5500	2680	6280	6700	1830	1500	578	3	6	2550	2850	
3F600	6000	2845	6780	7200	1995	1665	578	3	6	1950	2200		

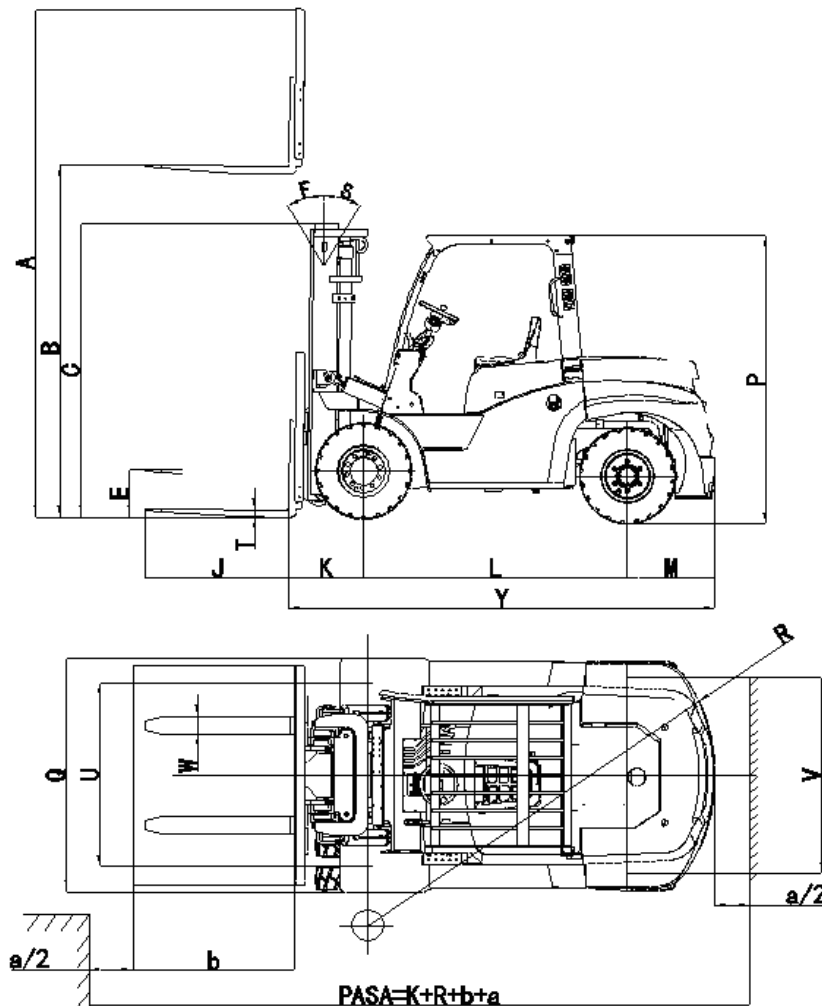

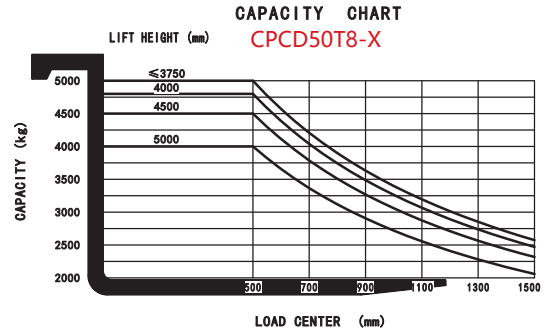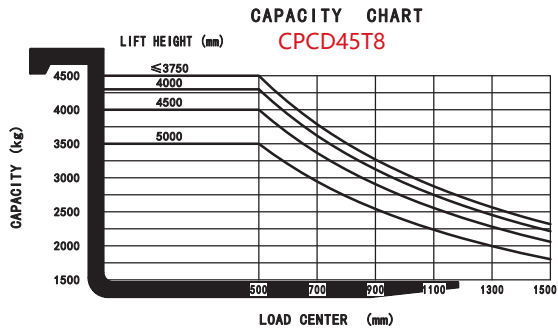

Option

Options	45T8	50T8-X
1 Fork length	○	○
2 Fork extension	○	○
3 Fold fork	○	○
4 Imported diesel engine	○	○
5 High exhaust	○	○
6 Dual air cleaners or special air cleaner	○	○
7 Solid rubber tire	○	○
8 No marking solid tire	○	○
9 Overhead guard	●	●
10 Mast options	○	○
11 Attachments	○	○
12 Integrated side shift	○	○
13 Cabin	○	○
14 Heater	○	○
15 Front windshield with wiper	○	○
16 Rear windshield with wiper	○	○
17 Fan	○	○
18 Cabin without side door	○	○
19 Fire extinguisher	○	○
20 Suspension seat	○	○
21 Front work light	●	●
22 Rear working LED light	○	○
23 OPS system	○	○

Note: ● standard ○ option — NA

